




Spray Paver



SP1600C

*May be shown with Optional Equipment

Increased pavement bonding, enhanced aesthetics and streamlined operation on the jobsite



www.SprayPaver.com

Looking for ways to get a leg up on the competition and stay ahead of the curve? Spray paving is a simple solution that improves the performance of the pavement you put down. Creating an optimal bond between the emulsion and pavement prevents premature pavement failure and reduces potholes. DOT's are starting to take notice of this improved performance and are increasing the number of jobs let each year of this innovative process.



Smart, Easy, Simple

Why Spraypaving?

Adding an Integral dx Spraypaver attachment to your fleet you are essentially combining the function of a paver and a tack truck into one, without buying a specialized paver. With the emulsion tanks and spray bars integrated onto your existing machine, there is no time for the emulsion to break down before laying new hot mix asphalt. Because the spray bars are integrated into your conventional paver no vehicle tires or paver wheels or tracks touch the tack preventing tack from contaminating additional roads and driveways. This can improve public perception and streamline your operation.



Advantages of a Spraypaving Attachment

The Integral dx spray paving attachment is the economical solution to keeping your team competitive. It offers you the flexibility to switch between conventional paving and spray paving. Just send us your conventional paver and we set it up for use with our CAT-approved Spray paving attachment.




Our attachment gives contractors the capacity to bid on all spray paving jobs regardless of size or scope. The spray bars are adjustable from 10ft-18ft, with an optional extension package that reaches up to 22ft wide. The onboard smart control system automatically adjusts the nozzles and spray valves when your operator adjusts the width. A pendant control is also included giving the operator the option to adjust width and valve nozzles from remote. Our emulsion tanks hold up to 1600 gallons, and include 2in thick Rockwool insulation to maintain optimal temperature. Our hydraulic systems are 100% independent of the paver hydraulics. This provides a safe, responsive and accurate method of power to the emulsion pumps and the spray bar positioning cylinders.

In an effort to provide top notch service to our clients and servicing dealers Integral dx has incorporated a troubleshooting system into our smart control system. Additional sensors and software provide the ability to log feedback data allowing us to respond in real-time to any set-up, calibration or overall operation obstacles that come up in the field.

Custom Builds

To fit your specific needs, we can offer customization on each **Integral dx Spraypaver attachment**. Our Sales department and Engineers enable us to meet your specifications to accomplish your job site goals.

Contact our Sales department for more information on customizing your Spraypaver attachment!

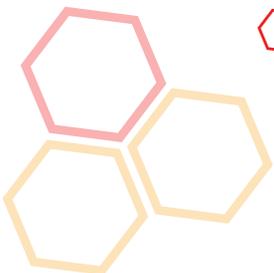

Product Specifications





Capacities

Hydraulic Tank	23 gal
Hopper Capacity	7 tons
Emulsion Tank	1600 gal
Optional Cleanout Tank	50 gal

Specifications

Control Voltage	24v
Heating System	120v-240v
Total Number of Spray Nozzles	35
Weight of Spray System	9500 lbs
Maximum Spray Width	18.5ft
Maximum Gallons per Minute	70 GPM
Operating Speed Range	12-120 FPM

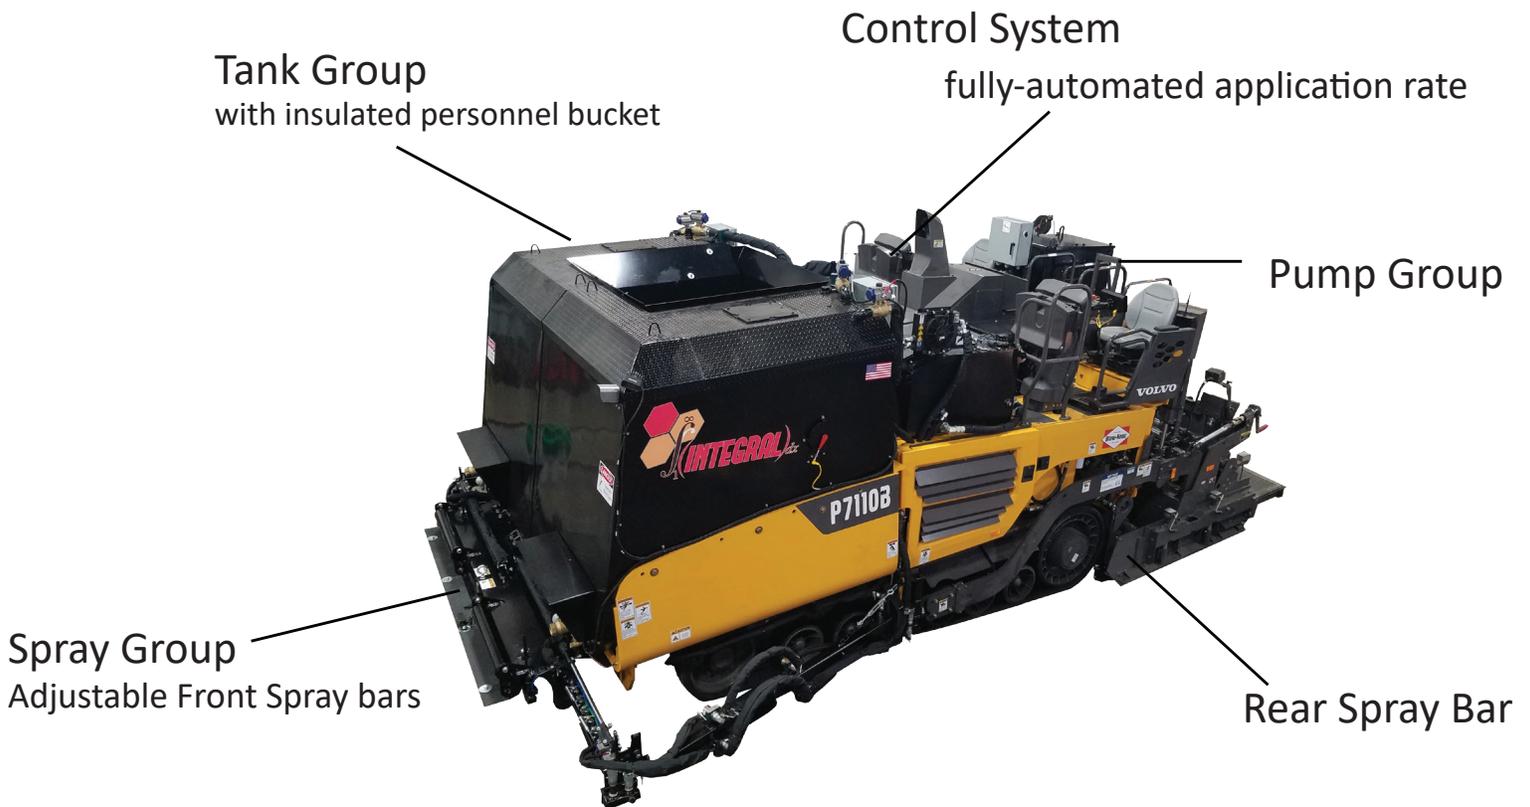

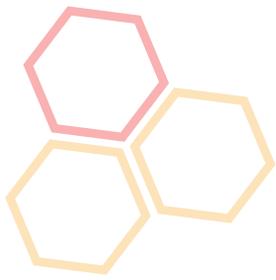

Spray Paver



"I used to run Roadtec Spray Pavers, they did well but were complicated and hard to clean. The Integral dx Spray Paver is way more user friendly, easier to do maintenance on and easier to clean not to mention it's sitting on a CAT Paver"

-Mike Wallin, Big Creek Construction

"The Cat / Integral dx Spray Paver is simplistic in the best way and diverse to meet the customer and DOTs' ever-changing demands. The service has been top notch as well from the training of our service techs to the customers having direct contact to Integral's team for fast resolution."

-Richard Graves, Former Paving Market Account Manager at Holt Cat

Integral dx is an ISO 9001-2015 certified OEM



Rev 25.3